

DESIGN SPECIALTIES


ALTERNATIVE MOUNTING METHOD FOR DESIGN SPECIALTIES FIREPLACE DOORS DESIGNED TO FIT FACTORY BUILT FIREPLACES

NOTE:

DUE TO THE VAST NUMBER OF MANUFACTURERS OF FACTORY BUILT FIREPLACES, WE HAVE PROVIDED A MOUNTING SYSTEM TO FIT THE GREATEST NUMBER OF FIREPLACES. HOWEVER, IT MAY BE NECESSARY TO USE AN ALTERNATIVE TO OUR STANDARD METHOD OF INSTALLATION. THE INSTALLER MUST DETERMINE THE BEST METHOD TO GET THE FIREPLACE DOOR MOUNTED SECURELY TO THE OPENING. THE ALTERNATIVE BRACKETS MAY BE USED INSTEAD OF THE STANDARD BRACKETS OR IN COMBINATION WITH THE STANDARD BRACKETS TO GET THE BEST RESULTS.

TOOLS NEEDED :

PENCIL
1/8" DRILL
PHILLIPS SCREWDRIVER
PLIERS OR 11/32" WRENCH
(IF WINGNUTS DONT WORK)
3/32" ALLEN WRENCH
(FOR ADJUSTMENT)




4 ALTERNATIVE BRACKETS



8 SCREWS

INSTRUCTIONS:

THE BRACKETS MAY BE PLACED INSIDE THE OPENING ANYWHERE A SUITABLE MOUNTING SURFACE IS PROVIDED. BRACKETS SHOULD BE SECURED BY ONE OR MORE SCREWS PROVIDED. THE BRACKET FRONT EDGE SHOULD BE FLUSH WITH THE FACE OF THE FIREPLACE OPENING. THE BRACKETS MAY BE CUT OR ALTERED AS NECESSARY. LOOSEN THE MOVEABLE ATTACHMENT STUD AND SLIDE THE STUD TO ALIGN WITH THE SLOT IN THE MOUNTING BRACKET. PLACE THE DOOR ONTO THE BRACKETS AND FASTEN THE DOOR WITH THE NUTS PROVIDED.

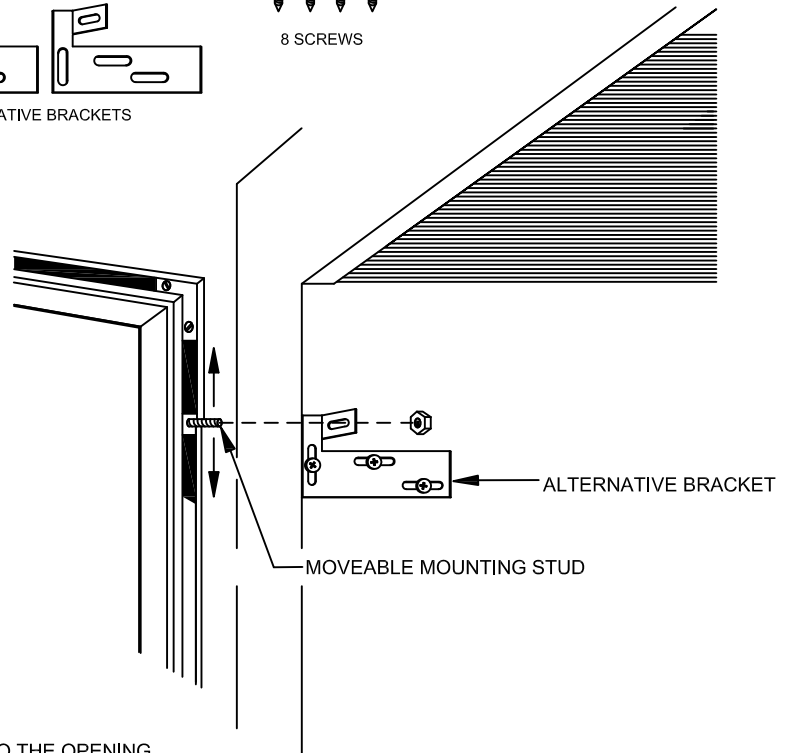

ANOTHER WAY TO ATTACH THE FIREPLACE DOOR TO THE OPENING IS TO ATTACH THE BRACKETS TO THE BACK OF THE FIREPLACE DOOR FIRST. THEN PLACE THE DOOR INTO THE OPENING. "TEK" (SELF DRILLING) SCREWS WORK GREAT. THESE SCREWS ARE NOT INCLUDED IN THE HARDWARE KIT.